

GrowSphere™ FLEX

GrowSphere™ FLEX brings professional-grade irrigation and fertigation automation to small and medium-sized farms and landscaping projects.

With intuitive, reliable control through GrowSphere™ Workspace, GrowSphere™ FLEX manages valves, dosing channels, pumps and sensors with precision. Designed for flexibility, GrowSphere™ FLEX can operate independently or integrate smoothly into larger, multi-device systems as your operation expands



Advanced Features

💧 Ideal for both irrigation and landscape applications

💧 Smart alerts and notifications

💧 Simple to use, intuitive interface that makes irrigation tasks quick and efficient

💧 Integrates with the **GrowSphere™** cloud Workspace

💧 Flexible and secure remote access from anywhere

💧 Easily manage single units or complex multi-device setups

💧 Modular configuration

Supported Irrigation Devices


Object	
Mainline	1
Valves	Up to 16 local DC or AC valves (AC valve requires GS DC to AC RELAY BOX)
Irrigation by time/quantity	Both
Dosing channels	4
Connection to internet	Cellular
Analog input	4
Digital input	8
Serial input	3

Programs, Shifts and Recipes

Object	
Irrigation programs	8
Shifts per program	8
Dosing methods	Bulk, spread or proportional
Dosing recipes	8

Internal Design

- RTC battery
- SIM card slot
- SD card slot
- Technician cable input
- Main battery.....
- Serial SDI-12 input
- Charging indication LED
- Reset button
- Digital inputs
- Serial RS-232 input
- Digital outputs
- Serial RS-485 input
- Analog inputs

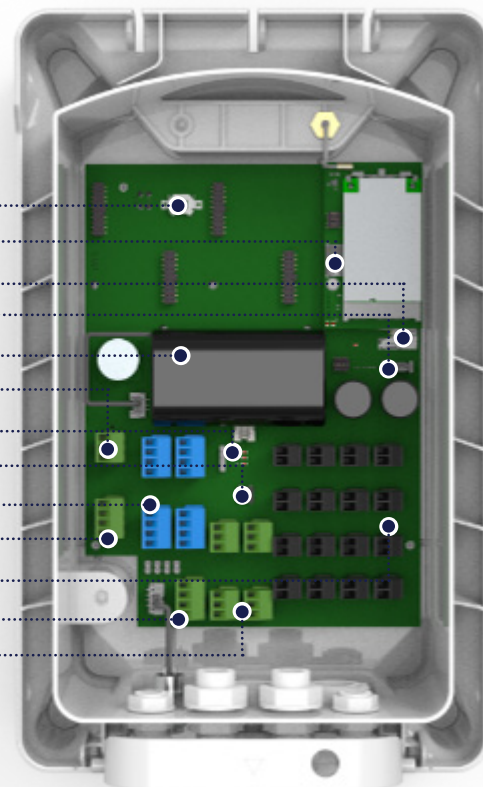

Catalog Numbers

GrowSphere™ FLEX

Material	Material Description
74717-000001	GS FLEX WITH SOLAR PANEL 5.5W
74717-000002	GS FLEX WITH OUT SOLAR PANEL
74718-000012	GS DC to AC RELAY BOX
74718-000003	GS SOLAR PANEL - 5.5W - 5m CABLE
74718-000002	GS SOLAR PANEL - 11W - 5m CABLE
74718-000014	TRANSFORMER- 230V to 24VAC 2.5A IP68
74718-000013	TRANSFORMER- 110V to 24VAC 2.5A IP68

Technical Specifications

Master – MCU

STM32L496ZGT3:

- Ultra-low-power with FPU Arm Cortex-M4 MCU
- Clock 8 MHz
- 1 Mbyte of Flash memory

Bluetooth Low Energy Model

ESP32-C3-WROOM-02-N4:

- Single-Core
- Bluetooth 5 (LE) 2.4Ghz
- PCB Antenna

Additional Features

- USB Communication (UART) – Type C
- SD Card
- Reed Switch Activation
- Buzzer
- Real Time Clock (RTC)
- 3x Expansions – LVTTTL communication

Digital Input

Number of Connectors:

- 4

Number of DIs:

- 8

Pin Configuration:

- Feed – Input – Input – Ground

Voltage Feed Supplier:

- 2.25 to 15 V
- Up to 330 mA

Input Voltage:

- 0 – 3.3 V

High Logic:

- >2.8 V

Low Logic:

- <0.8 V

Maximum Frequency:

- 100 Hz

Weight and Size

Dimensions:

- 25X15X10 (cm)

Weight:

- 1.15 Kg

Package Dimensions:

- L-348 W-228 H-190

Product + package weight

- L-348 W-228 H-190

Analog Input

Number of Connectors:

- 4

Pin Configuration:

- Feed – Input – Ground

Voltage Feed Supplier:

- 2.25 to 15 V

- Up to 330 mA

Change Mode Type:

- By Software

Modes:

- Voltage (1/3)

- Voltage (1/4)

- Current

Input Range:

- 0 to 5 V

- 0 to 10 V

- 0 to 20 mA

Bit Resolution:

- 12 bits, Max 16 bits

Accuracy:

- 99%

Power Input

Input Battery:

- 3 – 5 V (Charge Up to 1A, Discharge Up to 3A)

Input Solar Panel / Charger:

- 5.5 – 7.8 V (Up to 1A)

Battery Connectors:

- Chargeable

- Disposable

Pin Configuration:

- VBAT – Therm – Ground

- VBAT – Ground

Digital Output

Number of Connectors:

- 16

Pin Configuration:

- Positive – Negative

Capacitor:

- 4700 uF
- 10,000 Hours

Charge Time:

- Up to 500 milli-seconds

Maximum Voltage Output:

- Up to 15 V

Serial

Number of Connectors:

- 3

Modes:

- SDI12
- RS232
- RS485

Baud Rate:

- 1200
- 9600

Bit Configuration:

- 8N1

Main Battery Features

Model:

- BP5200A

Nominal capacity:

- 5200mAh

Nominal voltage:

- 3.7V

Nominal charge current:

- 1040mA

Nominal discharge current:

- 1040mA

Maximum charge current:

- 3000mA

Maximum discharge current:

- 3000mA

Maximum charge voltage:

- 4.25V

Final voltage:

- 2.95V

Battery Description

Average Current Consumption:

- 69.66mA

Unit Battery Life:

- 1.20 days

Battery Parameters

Effective Battery Capacity:

- 2000mAh

Nominal Battery Voltage:

- 3.7v

Quantity of Broadcast Data Per Hour:

- 4

Irrigation Per Day:

- 24

Technical Assets

Scan QR Code

